

NMRA Technical Note	
Layout Command Control™ (LCC) Configuration Description Information (CDI)	
July 22, 2024	TN-9.7.4.1

Adopted as a NMRA Technical Note

The OpenLCB Standard document appended to this cover sheet has been formally adopted as a NMRA Standard by the NMRA Board of Directors on the date shown in the *Adopted* column in the *Version History* table below.

Version History

Date	Adopted	Summary of Changes
Feb 17, 2015		Initial version submitted for public comment
Feb 6, 2016	Feb 20, 2016	Minor grammatical corrections and readability improvements
Apr 25, 2021	July 2, 2021	Changed LCC logo to include the ® symbol Changed “Layout Command Control” to have the ™ symbol Added the NMRA Legal Disclaimer fine-print Changed the OpenLCB license to “Creative Commons Attribution-ShareAlike 4.0 International”
July 22, 2024		The size of integer variables is restricted to 1, 2 or 4 bytes Define signed vs unsigned behavior of integer variables The requirement that unused bytes in a String variable be set to null has been removed Addition of float variables Discussion of possible ways of representing group names

Important Notices and Disclaimers Concerning NMRA Standards Documents

The Standards (S), Recommended Practices (RP), Technical Note (TN) and Technical Information (TI) documents of the National Model Railroad Association (“NMRA Standards documents”) are made available for use subject to important notices and legal disclaimers. These notices and disclaimers, or a reference to this page, appear in all standards and may be found under the heading “Important Notices and Disclaimers Concerning NMRA Standards Documents.”

Notice and Disclaimer of Liability Concerning the Use of NMRA Standards Documents

NMRA Standards documents are developed within the Standards and Conformance Department of the NMRA in association with certain Working Groups, members, and representatives of manufacturers and sellers. NMRA develops its standards through a consensus development process, which brings together volunteers representing varied viewpoints and interests to achieve the final product. NMRA Standards documents are developed by volunteers with modeling, railroading, engineering, and industry-based expertise. Volunteers are not necessarily members of NMRA, and participate without compensation from NMRA.

NMRA does not warrant or represent the accuracy or completeness of the material contained in NMRA Standards documents, and expressly disclaims all warranties (express, implied and statutory) not included in this or any other document relating to the standard or recommended practice, including, but not limited to, the warranties of: merchantability; fitness for a particular purpose; non-infringement; and quality, accuracy, effectiveness, currency, or completeness of material. In addition, NMRA disclaims any and all conditions relating to results and workmanlike effort. In addition, NMRA does not warrant or represent that the use of the material contained in NMRA Standards documents is free from patent infringement. NMRA Standards documents are supplied “AS IS” and “WITH ALL FAULTS.”

Use of NMRA Standards documents is wholly voluntary. The existence of an NMRA Standard or Recommended Practice does not imply that there are no other ways to produce, test, measure, purchase, market, or provide other goods and services related to the scope of the NMRA Standards documents. Furthermore, the viewpoint expressed at the time that NMRA approves or issues a Standard or Recommended Practice is subject to change brought about through developments in the state of the art and comments received from users of NMRA Standards documents.

In publishing and making its standards available, NMRA is not suggesting or rendering professional or other services for, or on behalf of, any person or entity, nor is NMRA undertaking to perform any duty owed by any other person or entity to another. Any person utilizing any NMRA Standards document, should rely upon their own independent judgment in the exercise of reasonable care in any given circumstances or, as appropriate, seek the advice of a competent professional in determining the appropriateness of a given NMRA Standards documents.

IN NO EVENT SHALL NMRA BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO: THE NEED TO PROCURE SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE PUBLICATION, USE OF, OR RELIANCE UPON ANY STANDARD OR RECOMMENDED PRACTICE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE AND REGARDLESS OF WHETHER SUCH DAMAGE WAS FORESEEABLE.

Translations

NMRA’s development of NMRA Standards documents involves the review of documents in English only. In the event that an NMRA Standards document is translated, only the English version published by NMRA is the approved NMRA Standards document.

Official Statements

A statement, written or oral, that is not processed in accordance with NMRA policies for distribution of NMRA communications, or approved by the Board of Directors, an officer or committee chairperson, shall not be considered or inferred to be the official position of NMRA or any of its committees and shall not be considered to be, nor be relied upon as, a formal position of NMRA.

Comments on Standards

Comments for revision of NMRA Standards documents are welcome from any interested party, regardless of membership. However, **NMRA does not provide interpretations, consulting information, or advice pertaining to NMRA Standards documents.**

Suggestions for changes in documents should be in the form of a proposed change of text, together with appropriate supporting comments. Since NMRA standards represent a consensus of concerned interests, it is important that any responses to comments and questions also receive the concurrence of a balance of interests. For this reason, NMRA, its departments, Working Groups or committees cannot provide an instant response to comments, or questions except in those cases where the matter has previously been addressed. For the same reason, NMRA does not respond to interpretation requests. Any person who would like to participate in evaluating comments or in revisions to NMRA Standards documents may request participation in the relevant NMRA working group.

Laws & Regulations


Users of NMRA Standards documents should consult all applicable laws and regulations. Compliance with the provisions of any NMRA Standards document does not constitute compliance to any applicable regulatory requirements. Implementers of the standard are responsible for observing or referring to the applicable regulatory requirements. NMRA does not, by the publication of NMRA Standards documents, intend to urge action that is not in compliance with applicable laws, and NMRA Standards documents may not be construed as doing so.

Copyrights

NMRA Standards documents are copyrighted by NMRA under US and international copyright laws. They are made available by NMRA and are adopted for a wide variety of both public and private uses. These include both use, by reference, in laws and regulations, and use in private self-regulation, standardization, and the promotion of modeling, structural and engineering practices and methods. By making NMRA Standards documents available for use and adoption by public authorities and private users, NMRA does not waive any rights in copyright to the NMRA Standards documents.

IMPORTANT NOTICE

NMRA Standards documents do not guarantee or ensure safety, security, health, or environmental protection, or ensure against interference with or from other systems, devices or networks. NMRA Standards documents development activities consider research and information presented to the standards development group in developing any safety recommendations. Other information about safety practices, changes in technology or technology implementation, or impact by peripheral systems also may be pertinent to safety considerations during implementation of the standard. Implementers and users of NMRA Standards documents are responsible for determining and complying with all appropriate safety, security, environmental, health, and interference protection practices and all applicable laws and regulations.

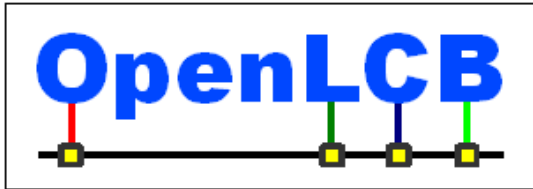

OpenLCB Technical Note	
Configuration Description Information	
July 22, 2024	Adopted

1 Introduction

- “Configuration description information” in this context refers to *fixed* information available from an OpenLCB device, via OpenLCB, so that other devices can properly and correctly configure it. The information is fixed, so that it can be pre-compressed, stored in the device, and just supplied when needed with minimal work on the part of the device and the device's developers. This means that e.g. the actual current configuration contents are not available as part of the CDI, as that is variable information. Similarly, the CDI cannot contain e.g. a serial number as that would require different CDI contents in each node of a single type.
- Other information may be available via e.g. manuals or the Internet, and there may be pointers to that information in the CDI, but the format of that information is not under specification here.

- A key use for CDI is to enable a Configuration Tool (CT) to know how to configure the node. The configuration tool will use the CDI information to render some form of suitable Graphical User Interface to allow the user to easily and intuitively configure all aspects of the node's capabilities. An important design choice was to embed the CDI into each node so that the system has all it needs to configure the node without having to source the information externally to the OpenLCB network from the manufacturer or some other on-line repository via the Internet or a CD/DVD etc. While the CT is likely to be a program running on a PC, it could be a hand-held device like mobile phone or PDA or even a custom-built device.

2 Annotations to the Standard

2.1 Introduction

Note that this section of the Standard is informative, not normative.

2.2 Intended Use

- Note that this section of the Standard is informative, not normative.

2.3 Reference and Context

Note that this section of the Standard is informative, not normative.

The Memory Configuration Protocol is one use for the CDI, and one way to retrieve it, but CDI is independent of that. See the OpenLCB Memory Configuration Protocol documentation.

- CiA 306 “Electronic data sheet specification” describes the CANopen version of a similar capability.

2.4 Content

“Initialized State” means talking on the OpenLCB, so CDI is fixed while you're up. But it can change when the node e.g. resets.

35 The CDI information isn't allowed to change while the node is up. A node may not change it after any part of it has been retrieved and before the next transition of the node away from the Initialized state. (The transition back to Initialized state tells other nodes to flush their caches and pick up any changed content.) A node using the CDI can assume that, once it's read the CDI, it doesn't need to read it again until the source node goes offline.

40 2.5 Format

The format can be extended later for e.g. compression, via changes to the 1st character or some other method.

45 The choice of XML version 1.0 was made to restrict the XML feature set that can be utilized in the CDI documents. Because the using node may not have external connections, XML features requiring those (Xinclude, schema default values, ...) are not be assumed to be present. By specifying XML 1.0 only, XInclude, XML Namespaces, XML Base, xml:id and other extensions have been excluded. The CDI may specify stylesheets (because the XML 1.0 standard is consistent with that).

50 The online schema is really the normative thing, because that's what we check for conformance testing. A node using the CDI is not required to validate it against the schema. But since the contents of the schema are normative, it has to obey the defaults, etc., for missing elements. There is further information about schema versions in the Section Future Extension.

55 Hexadecimal notation (0x1234) for numbers is not permitted. Although it may have made the CDI easier for people to read, the XML is primarily intended for consumption by OpenLCB nodes. Providing optional coding, such as hexadecimal numbers, makes those nodes more complex.

2.5.1 XML Elements

2.5.1.1 <identification> Element

60 There is a basic set of identifiers that allow a user to recognize a Node. These are: the manufacturer name, model name, certain version numbers; as well as a user-definable name and description. The first set of these is called “fixed” node identification information, because it only depends on the hardware (and firmware) of the node. The second set is user-modifiable, or “variable” identification of the node.

There are three ways for a Configuration Tool or a Network Browser tool to access this basic identification information:

- 65
- The fixed information may be encoded in the CDI as specific XML tags.
 - Both the fixed and the variable information can be available as specific Memory Spaces in a fixed format. This is called ACDI (or Abbreviated Configuration Description Information). This access method allows changing the variable information.
 - Both the fixed and the variable information can be fetched with one single message specifically designed for light-weight enumeration of all nodes using the Simple Node Information Protocol.
- 70

This Standard specifies the CDI-held information for format and access to the ACDI-held information. The standard also requires that all these different access methods must return the same values.

2.5.1.2 <acdi> Element

75 ACDI defines two specific memory spaces that contain the basic identification information. The layout of these spaces is fixed in the standard, and allows the Configuration Tool to access these values without needing to fetch and parse the CDI.

This is the equivalent descriptor to the ACDI spaces:

```

80 <segment origin='0' space='252'>
    <group>
        <name>Manufacturer Information</name>
        <description>Manufacturer-provided fixed node description</description>
        <int size='1'>
            <name>Version</name>
85 </int>
        <string size='41'>
            <name>Manufacturer Name</name>
        </string>
        <string size='41'>
90 <name>Node Type</name>
        </string>
        <string size='21'>
            <name>Hardware Version</name>
        </string>
95 <string size='21'>
            <name>Software Version</name>
        </string>
    </group>
</segment>
100 <segment origin='0' space='251'>
    <group>
        <name>User Identification</name>
        <description>Lets the user add his own description</description>
105 <int size='1'>
            <name>Version</name>
        </int>
        <string size='63'>
            <name>Node Name</name>
        </string>
110 <string size='64'>
            <name>Node Description</name>
        </string>
    </group>
</segment>

```

115 Manufacturers are encouraged to put these segment definitions into their CDI as well, especially the user-editable portion.

2.5.1.3 <segment> Element

A <segment> element is used to define information that is stored in a Memory Space (see the OpenLCB Memory Configuration Protocol). Some nodes may have only one memory space, others
120 may have multiple. There can be multiple segments that bind to the same Memory Space.

Node developers are advised to assign relatively short <name> values to segments, because certain Configuration Tools may use these as labels for a tabbed dialog box or similar.

2.5.1.4 Data Elements

125 This is the point of the whole standard: the actual Variables. The most important information for each variable is how to access it.

The Memory Configuration Protocol requires two values to access a piece of information: the Space number (8-bit integer) and the Address (32-bit integer). The Space value comes from the <segment> element.

Addresses are laid out by data length using a depth-first traversal algorithm:

- 130
1. At the start of the segment, set `current_address` to be the value of the attribute `'origin'` of the <segment> element, or 0 (zero) if this attribute is not present.
 2. For each child element:
 - 135
 - increment `current_address` by the attribute `'offset'` if present (can be negative!)
 - if it is a primitive type
 - 140
 - render the UI according to the element type, take `current_address` for data
 - post-increment `current_address` by the element size (8 for events, otherwise given by the `'size'` attribute)
 - if it is a group, check the replication count
 - 140
 - render a box or separator and header except if group is empty
 - recurse into the group to lay out all child elements
 - if there is any remaining replication left, repeat from to rendering box or separator

Data Elements support constraints for the values:

- 145
- Integers and floats have <min> and <max> elements inside. They constrain the range with endpoints inclusive i.e., <min>5</min> allows value 5 but disallows value 4.
 - All elements support a <map> which can be used to constrain the possible values to a fixed list, as well as provide user-readable descriptions to the values. Inside the map, the <property> entry is the one that should be written to the node, and the <value> entry is the one that should be displayed to the user.

Be aware that all data is to be written in big-endian byte order.

Any data element's <name> and <description> elements and the <group> element's <repname> elements are intended as hints for optional UI display by configuration tools.

A recommended approach for <repname> is:

- 155
1. If the <repname> element occurs the same number of times as the number in the "replication" attribute then they will be used as the group repeat labels directly in the UI.

2. If the <repname> element occurs at least once, but less than the number in the “replication” attribute, then the last occurrence should be extended to the group labels using the following, specific rules:

160 A) If the text in does not end with a decimal representation of an integer, then the group repetition number shall be appended to it, starting from 1..N, including the group repetition offset that received that specific label. Any whitespace at the end of the <repname> element should be preserved before appending the number.

For example,

165 <group replication=4><repname>Headlight</repname><repname>F</repname>
should translate into labels of "Headlight", "F1", "F2", "F3".

- B) If the text in ends with a decimal representation of an integer, then that integer shall be incremented by one for every additional group for which there were not enough elements. Note this does not imply any whitespace before the integer is needed.

170 For example

<group replication=4><repname>F0</repname>
should translate into labels of "F0", "F1", "F2", "F3".

175 Other UI representations are permitted. For example, some configuration tools use information from the contained elements for group labels in their UI.

2.5.1.4.3 <string> element

180 Note that node developers should not assume any particular contents in a string field beyond the first null character.

2.6 Future Expansion

185 This section provides guarantees that allow for a Configuration Tool designed for the current version of the standard be able to configure a node designed for a future version of the standard, allowing at least a common set of functionality to operate properly.

190 The guarantees given in the standard allow the algorithm for tracking the current address to function properly for future minor versions of the standard. This ensures that all known Data Elements are laid out by the Configuration Tool as intended by the CDI developer. Any unknown Data Elements can be skipped by the Configuration Tool. It is advised for Configuration Tool developers to identify to the user that an unknown element was found and an update to the software of the Configuration Tool may be required to have proper access to it.

195 On the other hand, a new major version of the standard may define the XML elements or the layout algorithm in a completely different way that prevents a Configuration Tool designed for an earlier version of the standard for properly following the layout algorithm.

3 Background Information

3.1 Environment of Proposal

3.1.1 Requirements

- 200
- Each node needs to carry enough context that a stand-alone configuration tool can provide a useful human interface without getting any data from an external source, e.g. needing an Internet download to handle a new node type. This allows a quality configuration experience to happen in a completely self-contained system.
 - Users want to configure a node entirely over the OpenLCB, without physical interactions, e.g. pushing buttons.
- 205

3.1.2 Preferences

- Small nodes shouldn't need a lot of processing power, e.g. to compress or decompress data in real time. Memory usage should also be limited, but is a second priority.
 - Configuration retrieval operations should be state-less and idempotent to simplify software at both ends. This is a preference for the CDI retrieval mechanism, not the CDI itself.
 - Multiple independent configuration operations can proceed at the same time. Specifically, multiple devices should be able to retrieve correct configuration description information at the same time. This is a preference for the CDI retrieval mechanism, not the CDI itself.
- 210

Design Points

- 215
- The “Variables” described here are not exactly the same thing as “Configuration Variables” (CVs) or “Node Variables” (NVs) that are discussed elsewhere, e.g. in DCC documentation. Those are aimed at storage, and so are grouped by address. The “Variables” here are grouped by function. “Long address” might be several DCC CVs, but would be one variable in this proposal. Similarly, DCC CV29 has lots of variables within it, each stored as bits.
- 220
- The primary design constraints are complexity and size in the OpenLCB device providing CDI, and complexity and size in the device consuming the CDI.
 - Size and complexity in the providing device is the more important constraint. There are more of those devices, they are cost sensitive, and they may not be upgradeable once delivered.
 - Size and complexity in the CDI-consuming device should also be considered. In particular, code complexity is an issue which must be addressed.
 - Secondary constraints are testability of the provided information, scalability of the format, and the convenience and availability of a suitable toolchain.
- 225
- There is a physical/logical structure to the configuration which the CDI can and should reflect:
 - The basic OpenLCB unit is a "Node". Nodes provide CDI for their needed configuration information. One possible protocol for that is the Memory Configuration Protocol.
 - A Node can contain zero or more "Producers". Each Producer is independently configured. There is no ordering between separate Producers, but they can be numbered for ease of reference.
- 230
- 235

- A Node can contain zero or more "Consumers". Each Consumer is independently configured. There is no ordering between separate Consumers, or between individual Consumers and Producers, but they can be numbered for ease of reference.
- Each Producer or Consumer can be configured with zero or one Events. A hardware port may have more than one Producer or Consumer (for example two: off and on).
- Each Event has an Identifier which uniquely defines it.
- To ensure future growth, there is no required "device", "channel" or other grouping within a node. Those may be present in some node types, and CDI must be able to represent them, but may not require any specific organization. In other words, organizing the configuration is left up to the Node developers. One OpenLCB product may be considered superior to another of equivalent hardware capabilities purely because its configuration is easier to understand and use for the end-user.

3.1.3 Storage

250 The configuration definition is stored in a hierarchical manner.

I) In what follows:

255 A "String" must be present; an "Optional String" does not have to be. Strings are in UTF-8.

An "Integer" may be signed; if no sign, it's taken as positive.

A "Map" provides a set of named descriptive values. It contains:

- Name: Optional String, if present required to be unique within enclosing group or node
- Description: Optional String
- 1 or more "Key", "Value" pairs. Each element of the pair can be of any supported type, depending only on how it is to be used.

265 Map elements provide a mapping between the pairs they contain. For example, a map can relate numeric values for a variable to descriptive strings. A map can also be used to provide free-form documentation when neither the key nor the value are specified in advance. It may be useful in the future to specify how maps can be defined at the group level to reduce duplication. Having the possibility of a "Name" is meant to ease that future effort.

270 II) At the top, root level is the information for a "node". This includes:

- Manufacturer: String
- Model: If present, the human-readable model name the manufacturer gives to this node.
- Version: If present, the human-readable version string for the current board.
- An optional Map for storing custom attributes defined by the manufacturer. Any other information desired can be added to this map.

III) Within the node is zero or more "groups". Each group contains:

- Name: String, required to be unique within enclosing group or node
- Description: Documents to the end-user the logical contents.

- Replication count: Integer ≥ 1 (number of times this group is replicated within the parent item)

285 A group with a replication count > 1 (called a replicated group) can be used to represent a type of replicated device. For example, a node with 4 identical input devices and 6 identical output devices can be compactly described by two groups, with replication counts of 4 and 6 respectively.

290 Instances within replicated groups are numbered from 1 to the replication count. If more than one replicated group is present, the numbering for each starts again with 1.

Groups may contain one or more inner groups, with the same representation. This may continue to any desired level.

295 IV) Groups may contain "variable" descriptions of various types.

IV-a) A "variable" description contains:

- Type: represented by the element tag. Can be int, string (UTF-8), eventid, float. Previously other types were also considered, e.g. "bit", "digit" (an unsigned binary-coded-decimal value), "signed" (a binary value with a sign), "unsigned" (a binary value without a sign), "blob" (arbitrary byte vector).
- Name: String, required to be unique within enclosing group or node
- Max: Integer - the maximum value allowed.
- Min: Integer - the minimum value allowed.
- Size: describes how many bytes are occupied by this variable. Also used for integers and floats to describe the data type size (e.g. byte, word, dword etc). It is required for floats and strings.
- Description: Optional String
- Default: optional, for integer and float types only
- Offset: Optional integer offset to skip before this element in the layout, data is otherwise laid out by length in depth-first order.

315 A variable may contain zero or one map descriptions. If present, the map represents a mapping between possible values (the "Property" part of the map's pairs) and convenient names for them (the "Value" part of the map's pairs).

Note that the current value of a variable is not considered configuration definition information (see item 1A and 1B in the introduction).

320 Configuration information must not be packed into variables; each variable must represent one type of information. In particular, the use of individual bits within larger values to pack multiple pieces of information is forbidden; those must be represented as individual variables. (How the information is stored internally is up to the designer of the specific device, and is not restricted; this requirement is about access to the information, not about how it's laid out in physical memory. A possible way to organize internally bit-mapped information is to use an address translation scheme which maps each bit to a byte.)

3.2 Example

The following is not meant to show how configuration definition information would be stored, but what kinds of information would be stored. It's a description of a complex accessory decoder, the Digitrax DS54, modified for use in a Producer-Consumer model.

Hopefully the syntax will be self-explanatory. In any case, it's just for this example, not a proposal of any kind.

```
335 <?xml version="1.0"?>
    <cdi xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
        xsi:noNamespaceSchemaLocation="http://openlcb.org/schema/cdi/1/3/cdi.xsd">

    <identification>
340 <manufacturer>Digitrax</manufacturer>
    <model>DS54</model>
    <hardwareVersion>2.33</hardwareVersion>
    </identification>

345 <acdi/>

    <segment space='251'>
    <name>User Identification</name>
    <description>Lets the user add his own description</description>
350 <int size='1'>
    <name>Version</name>
    </int>
    <string size='63'>
    <name>Node Name</name>
355 </string>
    <string size='64'>
    <name>Node Description</name>
    </string>
    </segment>

360 <segment space="253">
    <int size="2">
    <name>Address</name>
    <description>The DCC address of the accessory decoder. This is not needed in OpenLCB
365 operation.</description>
    <min>0</min><max>2044</max>
    </int>

    <group replication="4">
370 <name>Channels</name>
    <description>Each channel is one pair of output wires and contains two inputs.</description>
```

```

<repname>Channel</repname>

<group>
375 <name>Turnout output</name>

    <int size="1"><name>Output option</name>
        <default>1</default>
        <map>
380 <relation><property>1</property><value>Pulse re-triggerable</value></relation>
        <relation><property>2</property><value>Pulse non-retriggerable</value></relation>
        <relation><property>3</property><value>Static light or slow-motion turnout
machine</value></relation>
        <relation><property>4</property><value>Blinking lamp</value></relation>
385 </map>
    </int>

    <int size="1"><name>Pulse length</name>
        <description>Specifies the length of the output pulses for the pulsed output options. Ignored when
390 output option is not pulsed.</description>
        <default>0</default>
        <map>
        <relation><property>0</property><value>0.125 sec</value></relation>
        <relation><property>1</property><value>0.25 sec</value></relation>
395 <relation><property>2</property><value>0.35 sec</value></relation>
        <relation><property>3</property><value>0.5 sec</value></relation>
        <relation><property>4</property><value>0.625 sec</value></relation>
        <relation><property>5</property><value>0.75 sec</value></relation>
        <relation><property>6</property><value>0.9 sec</value></relation>
400 <relation><property>7</property><value>1 sec</value></relation>
        <relation><property>8</property><value>2 sec</value></relation>
        <relation><property>9</property><value>3 sec</value></relation>
        <relation><property>10</property><value>4 sec</value></relation>
        <relation><property>11</property><value>5 sec</value></relation>
405 <relation><property>12</property><value>6 sec</value></relation>
        <relation><property>13</property><value>7.5 sec</value></relation>
        <relation><property>14</property><value>10 sec</value></relation>
        <relation><property>15</property><value>12 sec</value></relation>
        </map>
410 </int>

    <eventid>
        <name>Turnout closed</name>
        <description>When this event arrives, a turnout will be moved to the closed position or a lamp
415 will be switched to ON.</description>
    </eventid>
    <eventid>

```

```

    <name>Turnout thrown</name>
    <description>When this event arrives, a turnout will be moved to the thrown position or a lamp
420 will be switched to OFF.</description>
    </eventid>
  </group>

  <group replication="2"><name>Inputs</name>
425   <description>Input 1 is the SWITCH input, Input 2 is the AUX input for this channel</description>
    <repname>Input</repname>
    <eventid>
      <name>Input active</name>
      <description>This event is generated when the input line goes active. Independent from trigger
430 setup.</description>
      </eventid>
      <eventid>
      <name>Input inactive</name>
      <description>This event is generated when the input line goes inactive. Independent from trigger
435 setup.</description>
      </eventid>

    <group><name>Trigger</name>
      <description>Advanced triggering and local actions</description>
440
      <int size="1">
        <name>Trigger condition</name>
        <map>
          <relation><property>0</property><value>Positive Edge: OFF to ON</value></relation>
445   <relation><property>8</property><value>Negative Edge: ON to OFF</value></relation>
          <relation><property>1</property><value>Positive Level: ON</value></relation>
          <relation><property>9</property><value>Negative Level: OFF</value></relation>
          <relation><property>2</property><value>Output following: Output ON -- Positive
450 Edge</value></relation>
          <relation><property>3</property><value>Reverse output following: Output ON -- Negative
          Edge</value></relation>
        </map>
      </int>
      <eventid>
455   <name>Trigger event</name>
      <description>If set, this event is generated when triggered</description>
      </eventid>
      <int size="1">
        <name>Action</name>
460   <default>1</default>
        <map>
          <relation><property>1</property><value>No Action</value></relation>
          <relation><property>0</property><value>Output toggle</value></relation>

```

```

465     <relation><property>2</property><value>Output Thrown</value></relation>
        <relation><property>3</property><value>Output Closed</value></relation>
        <relation><property>7</property><value>Output Follows Input</value></relation>
        <relation><property>4</property><value>Turntable Pause</value></relation>
        <relation><property>5</property><value>Turntable Continue</value></relation>
470     <relation><property>6</property><value>Local Route</value></relation>
        </map>
        </int>
        </group>
    </group>

475     <int size="1"><name>Generate output events</name>
        <description>If set, local output modification by Advanced triggers will generate the same events
that would trigger that output change.</description>
        <default>0</default>
        <map>
480     <relation><property>0</property><value>off</value></relation>
        <relation><property>1</property><value>on</value></relation>
        </map>
        </int>
        </group>
485 </segment>
</cdi>

```

490 This example tries to follow the configuration options of the DS54 moderately accurately. This means that most of the features are present, and where meaningful, the enumeration values were kept, but in a number of cases the conceptual model that the DS54 is following (LocoNet device and DCC accessory decoder) does not fit the conceptual model of an OpenLCB node. These conceptual differences were incorporated in some cases, but there was no attempt made on redesigning the product into a great OpenLCB Accessory Decoder, since that is not subject of this Technical Note.

- 495
- Addressing
 - The CV addressing scheme is not kept, because the address space of OpenLCB Configuration Space is not limited in size like that of DCC CVs using handheld throttles as configuration tools.
 - In particular there is no reason to encode multiple options in one CV, so the upper nibble – lower nibble encoding that the Triggers and Actions use was not reproduced. The conceptual requirement for the Variables in CDI is that each variable must be independently addressable, and byte is the smallest addressing unit.
 - No attempt was made to make the address layout friendly to the decoder code. In real life one might want to use the offset feature to lay out variables at aligned boundaries and repeated groups to have some nice alignment (say each repetition is 32 bytes) to allow for easier pointer manipulation.
 - In a real DS54, there are subtle differences between the Switch and Aux configuration choices on the various channels. Here we just used replication. For a real device, they could either be
- 500
- 505

- 510 separately specified or (more likely) the differences wouldn't matter in a P/C-based device. Also for a product choice the inputs would probably be better as numbered than named.
- Commands
 - Instead of receiving DCC turnout commands, the Output entities receive a pair of events to set the output to thrown or closed. There are alternate design options here: since each output channel is actually a pair of independently controllable outputs, there are four actual states (off-off, off-on, on-off, on-on). To reach all four states, a real device might want to add additional consumers and their configurable Event IDs. Also when receiving the DCC turnout commands, the four states interact with the “Output Type” setting in weird and wonderful ways. This was not represented in the example above.
 - Inputs
 - The input lines, symmetrically to the output lines, use a pair of Event IDs to generate native OpenLCB commands. For most of the use-cases this makes the Advanced Triggering feature unnecessary. For example the input's native Event ID can be configured to be the same as the output thrown event, which will establish both the necessary local control as well as the reporting of local control (see “Generate output events” setting). In fact this is even more powerful, since local control is not restricted to the same output channel as the input button is assigned to.
 - Nevertheless, the Triggering concept was mapped into this configuration, and the Trigger can also be observed on the OpenLCB bus if needed by programming an Event ID into the Trigger producer. In a real world the user would probably either use the Active+Inactive producers or the Trigger producer, but probably not both.
 - Loconet messages
 - The original DS54 has extensive settings for generating various LocoNet messages. These are all superfluous, since the OpenLCB Event concept subsumes all the different use-cases (including power off, turnout feedback, sensor input, etc. -- they are all just Events)
 - Local routes and turnout chaining
 - In the Producer/Consumer model in OpenLCB these features are unnecessary, because the control model natively supports throwing multiple turnouts by a single Event on the bus. Just configure the same Event ID into all the respective turnouts for the desired direction. It is also possible to cause the feedback message from one input to throw another turnout by configuring them for the same Event ID.

3.3 Notes about compression

This section is non-normative notes and suggestions for implementors and future standardization efforts.

545 Some references for XML compression:

<http://www.ibm.com/developerworks/xml/library/x-datacompression/index.html?cmp=dw&cpb=dwxml&ct=dwnew&cr=dwnen&ccy=zz&csr=072111>

<http://www.cs.panam.edu/~artem/main/teaching/csci6370spring2011/papers/XML%20compression%20techniques%20A%20survey%20and%20comparison.pdf>

550 On the other hand, a look-back compression algorithm has the advantage that it's cheap to decompress and might do almost as well:

<http://excamera.com/sphinx/article-compression.html>

555 XML strings can start with a UTF BOM (either 0xEF, 0xFF or 0xFE in the 1st byte, since there's no need to support UTF-32BE or UTF-32LE), or the UTF-8 text for “<?xml” which starts with 0x3C. (But concern about support for too many character sets!)

A first byte of 0x80 could be defined as the “Compressed” indicator(s), followed by a byte that indicates the compression type. (We don't want to have too many kinds, as receivers need to implement all of them to be able to use the CDI!) 0x80 00 is the code for our choice of default, see <http://excamera.com/sphinx/article-compression.html>

560

Table of Contents

- 1 Introduction..... 1
- 2 Annotations to the Standard..... 1
 - 2.1 Introduction..... 1
 - 2.2 Intended Use..... 1
 - 2.3 Reference and Context..... 1
 - 2.4 Content..... 2
 - 2.5 Format..... 2
 - 2.5.1 XML Elements..... 2
 - 2.5.1.1 <identification> Element..... 2
 - 2.5.1.2 <acdi> Element..... 3
 - 2.5.1.3 <segment> Element..... 3
 - 2.5.1.4 Data Elements..... 4
 - 2.6 Future Expansion..... 4
- 3 Background Information..... 5
 - 3.1 Environment of Proposal..... 5
 - 3.1.1 Requirements..... 5
 - 3.1.2 Preferences..... 5
 - Design Points..... 5
 - 3.1.3 Storage..... 6
 - 3.2 Example..... 8
 - 3.3 Notes about compression..... 13